
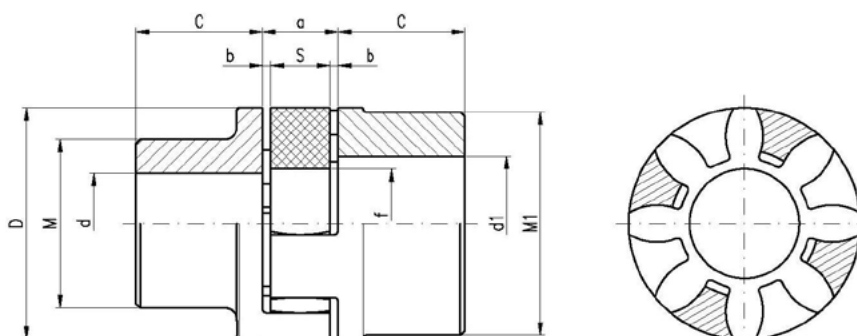


ELASTIČNA SKLOPKA GH

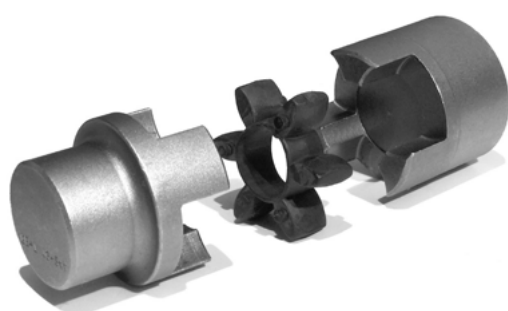

KOMPLET Z ELASTIČNIM ELEMENTOM									
PESTO A/A	PESTO A/B	PESTO B/B	VELIKOST	PRENOS MOČI $P/n = \text{kW}/\text{min}^{-1}$	IZVRTINA max. d	IZVRTINA max. d ₁	PESTO M	PESTO M ₁	VRTILNI MOM. Nm
T 64631	T 64640	T 64641	19 – 24	0.0032	19	24	30	40	31
T 64632	T 64642	T 64653	24 – 32	0.0112	24	32	40	55	107
T 64633	T 64643	T 64654	28 – 38	0.032	28	38	48	65	306
T 64634	T 64644	T 64656	38 – 45	0.063	38	45	66	80	602
T 64635	T 64645	T 64658	42 – 55	0.087	42	55	75	95	831
T 64636	T 64646	T 64660	48 – 60	0.100	48	60	85	105	955
T 64637	T 64647	T 64661	55 – 70	0.120	55	70	98	120	1.146
T 64638	T 64648	T 64662	65 – 75	0.150	65	75	115	135	1.432
T 64639	T 64649	T 64663	75 – 90	0.350	75	90	135	160	3.343

VELIKOST	a	b	C	D	f	M	M1	S	PRENOS MOČI kW PRI vrt./min				
									63	750	1.500	2.000	3.000
19 – 24	16	2,0	25	40	18	40	40	12	0,2	1,8	3,5	4,7	7,1
24 – 32	18	2,0	30	55	27	40	55	14	0,5	6,2	12,4	16,5	25,0
28 – 38	20	2,5	35	65	30	48	65	15	1,5	17,7	35,3	47,1	70,6
38 – 45	24	3,0	45	80	38	66	80	18	2,9	34,7	69,1	92,7	139,0
42 – 55	26	3,0	50	95	46	75	95	20	4,0	47,8	95,6	127,9	191,2
48 – 60	28	3,5	56	105	51	85	105	21	4,6	55,2	110,3	147,1	220,6
55 – 70	30	4,0	65	120	60	98	120	22	6,0	66,2	132,4	176,5	264,7
65 – 75	35	4,5	75	135	68	115	135	26	6,8	80,9	161,8	216,2	323,5
75 – 90	40	5,0	85	160	80	135	160	30	16,2	192,7	382,4	513,2	772,1

ELASTIČNI ELEMENT	
ŠIFRA	VELIKOST
T 45324	19 – 24
T 45325	24 – 32
T 45326	28 – 38
T 45327	38 – 45
T 45328	42 – 55
T 45329	48 – 60
T 45330	55 – 70
T 45331	65 – 75
T 45332	75 – 90

Oblika:

- A ... malo pesto
- B ... veliko pesto

Material:

Pesto: Siva litina
 Elastični element: Thermopren 92-94 Shore

Temperaturno območje obratovanja: -40°C do 120°C

KONTAKT

